

KOOK 80


Wood Insertion Cookers

CADEL

Certificate model name : KOOK80



Nominal power	kW	7,5
Reduced power	kW	-
Introduced thermal power (max)	kW	9,5
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Seasonal energy efficiency	ηs [%]	73
Nominal efficiency	%	82,5
Reduced efficiency	%	-
Heating volume (min-max)	m³	214
Nominal CO at 13% O ₂	%	0,07
Reduced CO at 13% O ₂	%	-
Emissions CO (13% O ₂) (min-max)	mg/Nm³	916
Emissions OGC (13% O ₂) (min-max)	mg/Nm³	29
Emissions NOX (13% O ₂) (min-max)	mg/Nm³	95
Dust content at 13% O ₂ (min-max)	mg/Nm³	27
Boiler capacity (H ₂ O)	l	-
Hopper capacity	kg	-
Combustible		Legna
Hourly consumption (min-max)	kg/h	2,2
Autonomy (min-max)	h	-
Ignition electrical absorption (max)	W	-
Operating electrical absorption (max)	W	-
Supply and frequency	V - Hz	-
Chimney flue depression	Pa	12
Mass of smoke (min-max)	g/sec	6,9
Exhaust fumes temperature (max)	°C	264
Net weight	kg	138,2
Gross weight	kg	153,8
Exhaust fumes (A)	Ø mm	140
Hole combustion air inlet (B)	Ø mm	80
Ducting outlet (C)	Ø mm	-
Ducting capability up to	m	-

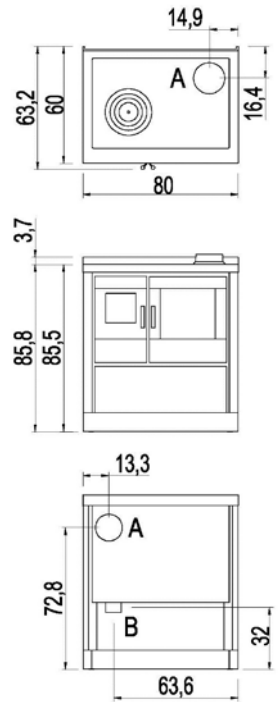

MATCH

71220001		Stainless steel	EAN 8053859016212
71220002		Anthracite steel	EAN 8053859016229
71220004		Black steel	EAN 8053859016243

OPTIONAL

5013003	Top	EAN 8033123613361
5021005	Raccordo 140/150 mm	EAN 8053859014256

PLUS



Cooking



Central Top and back exhaust



Refractory stone inner with 2nd combustion air



OPTIONAL
Ventilation + light kit




View on the oven



Built - in


STOVE PACKING



L (cm)	H (cm)	P (cm)
97	102,1	79


VOLUME (m³)
0,78

LINING PACKING



	L (cm)	H (cm)	P (cm)
steel	60	13,5	80

STOCKING



TRANSPORT

